

UNCLASSIFIED

AD NUMBER

AD477793

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; FEB 1966. Other requests shall be referred to Air Force Special Weapons Center, Kirtland AFB, NM. This document contains export-controlled technical data.

AUTHORITY

AFWL ltr, 30 Sep 1972

THIS PAGE IS UNCLASSIFIED

c1



# STATIC-STABILITY CHARACTERISTICS OF THE ALARR BOOSTER AND THE EFFECT OF THE PAYLOAD WAKE ON A FULL-SCALE BALLUTE AT SUPERSONIC SPEEDS

T. M. Perkins and T. R. Brice  
ARO, Inc.

February 1966

This document is subject to special export controls  
and each transmittal to foreign governments or foreign  
nationals may be made only with prior approval of  
AFSWC (SWTSS).

This document has been approved for public release  
its distribution is unlimited.

*Rev TAB 72-17 - dated  
Sept, '72*

**PROPULSION WIND TUNNEL FACILITY  
ARNOLD ENGINEERING DEVELOPMENT CENTER  
AIR FORCE SYSTEMS COMMAND  
ARNOLD AIR FORCE STATION, TENNESSEE**

PROPERTY OF U. S. AIR FORCE  
AEDC LIBRARY  
AF 40(600)1200

AEDC TECHNICAL LIBRARY



5 0720 0001 245

# *NOTICES*

When U. S. Government drawings specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

STATIC-STABILITY CHARACTERISTICS OF THE ALARR  
BOOSTER AND THE EFFECT OF THE PAYLOAD WAKE  
ON A FULL-SCALE BALLUTE AT SUPERSONIC SPEEDS

T. M. Perkins and T. R. Brice  
ARO, Inc.

This document is subject to special export controls  
and each transmittal to foreign governments or foreign  
nationals may be made only with prior approval of  
AFSWC (SWISS).

This document has been approved for public release  
its distribution is unlimited.

*Per TAB 72-17 dated  
1 Sept, '72*

## FOREWORD

This work was done at the request of the Air Force Special Weapons Center (AFSWC), Air Force Systems Command (AFSC), under System 921A, Project 9087.

The results of the tests presented were obtained by ARO, Inc. (a subsidiary of Sverdrup and Parcel, Inc.), contract operator of the Arnold Engineering Development Center (AEDC), AFSC, Arnold Air Force Station, Tennessee, under Contract AF40(600)-1200. The tests were conducted on November 1, 15, and 17, 1965, under ARO Project No. PS0611, and the manuscript was submitted for publication on January 27, 1966.

This technical report has been reviewed and is approved.

Francis M. Williams  
Major, USAF  
AF Representative, PWT  
DCS/Test

Jean A. Jack  
Colonel, USAF  
DCS/Test

**ABSTRACT**

Investigations were conducted in the 16-ft supersonic wind tunnel of the Propulsion Wind Tunnel Facility to determine the drag and stability characteristics of a ballute deployed in the wake of a full-scale Air Launch, Air Recoverable Rocket (ALARR) payload. The ballutes were deployed at Mach numbers 0.55 and 2.00 to 3.00 and exhibited excellent deployment and inflation characteristics. Force data were obtained on a 0.6-scale model of the ALARR booster with a modified speed brake at Mach numbers from 1.80 to 3.00. The booster with speed brake was statically stable in pitch for all Mach numbers tested

## CONTENTS

	<u>Page</u>
ABSTRACT . . . . .	iii
NOMENCLATURE . . . . .	vi
I. INTRODUCTION . . . . .	1
II. APPARATUS	
2.1 Wind Tunnel . . . . .	1
2.2 Test Articles . . . . .	2
2.3 Instrumentation . . . . .	2
III. PROCEDURE	
3.1 Test Conditions . . . . .	2
3.2 Precision of Measurements . . . . .	3
IV. RESULTS AND DISCUSSION	
4.1 Payload with Ballute, Phase I . . . . .	4
4.2 Booster Model, Phase II . . . . .	4
V. CONCLUSIONS . . . . .	5
REFERENCES . . . . .	6

## ILLUSTRATIONS

### Figure

1. Schematic of Tunnel 16S Test Section Showing Model Location	
a. Payload with Ballute, Phase I . . . . .	7
b. Booster with Modified Speed Brake, Phase II. . . . .	8
2. Photographs of ALARR Models Installed in Tunnel 16S	
a. Payload . . . . .	9
b. Ballute Package in Payload Base . . . . .	10
c. Booster with Modified Speed Brake . . . . .	11
3. Details of Models	
a. Payload with Movable Ballute and Single Suspension Line . . . . .	12
b. Payload with Fixed Ballute and Four-Point Suspension Lines . . . . .	12
c. Booster with Modified Speed Brake . . . . .	13
4. Modified Speed Brake . . . . .	14
5. Variation of Reynolds Number with Mach Number for Booster Phase (Phase II) . . . . .	15

<u>Figure</u>	<u>Page</u>
6. Variation of Ballute Drag Coefficient with Payload-Ballute Separation Distance . . . . .	16
7. Variation of Normal-Force Coefficient with Angle of Attack . . . . .	17
8. Variation of Pitching-Moment Coefficient with Angle of Attack . . . . .	18
9. Variation of Center-of-Pressure Location with Angle of Attack . . . . .	19
10. Variation of the Rate of Change of Pitching-Moment Coefficient with Mach Number at $\alpha = 0$ . . . . .	20
11. Variation of the Rate of Change of Normal-Force Coefficient with Mach Number at $\alpha = 0$ . . . . .	20
12. Variation of Neutral-Point Location with Mach Number . . . . .	20
13. Variation of Axial-Force Coefficient with Angle of Attack . . . . .	21
14. Variation of Forebody Axial-Force Coefficient with Mach Number at $\alpha = 0$ . . . . .	22
15. Variation of Base Axial-Force Coefficient with Mach Number at $\alpha = 0$ . . . . .	22

## NOMENCLATURE

$A_B$	Ballute area (nominal), $\frac{\pi D_B^2}{4}$ , ft <sup>2</sup>
$A_b$	Base area, $\frac{\pi D_b^2}{4}$ , ft <sup>2</sup>
$C_A$	Total axial-force coefficient, $\frac{\text{measured axial force}}{q_\infty S}$
$C_{A, b}$	Base axial-force coefficient, $\left( \frac{p_\infty - p_b}{q_\infty} \right) \frac{A_b}{S}$
$C_{A, F}$	Forebody axial-force coefficient, $C_A - C_{A, b}$



$C_D$	Ballute drag coefficient, $\frac{\text{measured drag}}{q_\infty A_B}$
$C_m$	Pitching-moment coefficient referenced to center of gravity (see Fig. 3), $\frac{\text{measured pitching moment}}{q_\infty S D}$
$C_{m_\alpha}$	Rate of change of pitching-moment coefficient with angle of attack $(dC_m/d\alpha)_{\alpha=0}$ , per degree
$C_N$	Normal-force coefficient, $\frac{\text{measured normal force}}{q_\infty S}$
$C_{N_\alpha}$	Rate of change of normal-force coefficient with angle of attack $\left(\frac{dC_N}{d\alpha}\right)_{\alpha=0}$ , per degree
$D$	Reference diameter of booster model, 0.867 ft
$D_B$	Ballute diameter (nominal), 2.18 ft
$D_b$	Booster base diameter, 0.562 ft
$d$	Reference diameter of payload, 1.44 ft
$L/d$	Payload-ballute separation distance in payload reference diameters
$M_\infty$	Free-stream Mach number
$p_b$	Static pressure at base of booster model, psf
$p_{t_\infty}$	Free-stream stagnation pressure, psf
$p_\infty$	Free-stream static pressure, psf
$q_\infty$	Free-stream dynamic pressure, $0.7 p_\infty M_\infty^2$ , psf
$Re/ft$	Reynolds number per foot, $\frac{V_\infty}{\nu_\infty}$
$S$	Model cross-sectional reference area, $\frac{\pi D^2}{4}$ , ft <sup>2</sup>
$V_\infty$	Free-stream velocity, ft/sec
$x_{cp}$	Center-of-pressure location in model reference diameters (D), negative aft of moment reference, $C_m/C_N$
$x_{np}$	Neutral-point location in model reference diameters (D), negative aft of moment reference, $(dC_m/dC_N)_{\alpha=0}$

$\alpha$	Angle of attack, corrected for balance and sting deflections, positive nose up, deg
$\nu_{\infty}$	Free-stream kinematic viscosity, ft <sup>2</sup> /sec

## SECTION I INTRODUCTION

The Air-Launch, Air Recoverable Rocket (ALARR) is designed to take atmospheric samples at altitudes above 60,000 ft. After completion of the sampling cycle, the payload is explosively separated from the booster, and the booster speed brake is deployed. After separation, a ballute is deployed from the payload to stabilize and slow the payload prior to deployment of a recovery parachute.

The present investigation was conducted in two phases. The purpose of Phase I was to determine the drag and stability characteristics of the ballute. For this purpose, a full-scale payload model was used. In one part of Phase I the ballute was suspended on a single line which could be reeled out to various lengths. The drag of the ballute was measured in this part. In the other part of Phase I the ballute was suspended on a fixed-length bridle which was attached to the payload at four points. For this part, only photographic data were obtained. The Mach numbers for Phase I were 0.55 and from 2.00 to 3.00. Comparative transonic data obtained with small scale models are available in Ref. 1.

The purpose of Phase II was to determine the effects of a modified speed brake on the drag and stability of the booster. In this phase a 0.6-scale model of the booster was tested at Mach numbers from 1.80 to 3.00 and angles of attack from -4 to 10 deg. Stability and drag data for the booster alone and with an earlier configuration of the speed brake are presented in Ref. 2.

## SECTION II APPARATUS

### 2.1 WIND TUNNEL

Tunnel 16S is a continuous flow, closed-circuit wind tunnel capable of operating from a stagnation pressure level of approximately 100 to 1800 psf. The test section is 16 ft square by 40 ft long. The Mach number range is from 1.65 to 3.20. A more detailed description of the tunnel and its calibration may be found in Ref. 3.

Schematics of the tunnel test section showing the ALARR payload and booster installations are presented in Figs. 1a and b. Photographs

showing typical model installations in the test section are shown in Figs. 2a, b, and c.

## 2.2 TEST ARTICLES

Sketches of the full-scale payload, the ballute, and the 0.6-scale booster are presented in Figs. 3a, b, and c. The booster model was tested with a modified speed brake (Fig. 4) which had a cross-sectional area of 2.20 sq ft. Both the payload and booster were constructed of aluminum. The ballute, which was supplied by Goodyear Aerospace Company, was constructed principally of Viton rubber. In Phase I the position of the ballutes was varied from 2.6 to 8 payload diameters downstream of the payload base using a single suspension line and cable attached to an electric winch. The cable ran from the winch through the support strut and was conveyed through the model by a pulley system to a swivel and then to the ballute attachment point. The pulley and load-cell arrangement is shown in Fig. 3a. Also a four-point attachment bridle and riser line were utilized to deploy the ballute three diameters aft of the payload. A swivel was not employed in this configuration. The suspension arrangement for the fixed ballute is shown in Fig. 3b.

## 2.3 INSTRUMENTATION

For Phase I, the position of the movable ballute downstream of the payload was determined by a Selsyn transmitter attached to the electric winch. The drag of the ballute was measured with a load-cell located inside the model as shown in Fig. 3a. High speed motion picture cameras were used for visual coverage of all deployments.

For Phase II, a six-component, internal strain-gage balance was used to measure aerodynamic forces on the model. Base pressure measurements were obtained from a pressure transducer connected to two orifices located in the plane of the model base. The readout equipment for these measurements is described in Ref. 1.

# SECTION III PROCEDURE

## 3.1 TEST CONDITIONS

### 3.1.1 Phase I

Static and dynamic drag data were recorded for the ballute deployments obtained with the extendable riser at Mach numbers 2.00 and 2.50.

The ballutes were initially deployed three diameters behind the payload and then reeled out and in so as to obtain static drag data for payload-ballute separation distances in the range from 2.6 to 8.0 payload diameters. Static data were also obtained at  $M_\infty = 3.00$  with the ballute already deployed from a previous Mach number. Tunnel conditions for the extendable riser ballute tests were:

$M_\infty$	$q_\infty$ , psf	$(Re/ft) \times 10^{-6}$
2.00	201	0.84
2.51	205	0.80
3.01	200	0.87

For the fixed-length bridle and riser, deployments were made at the following conditions:

$M_\infty$	$q_\infty$ , psf	$(Re/ft) \times 10^{-6}$
0.55	38	0.34
2.20	380	1.51
3.00	120	0.57

### 3.1.2 Phase II

Force data were obtained on the booster model with speed brake at Mach numbers from 1.80 to 3.00 and angles of attack from -4 to 10 deg. Stagnation pressures varied from 330 to 720 psf. The variations in Reynolds number per foot are shown in Fig. 5.

## 3.2 PRECISION OF MEASUREMENTS

The estimated precision of the test data for Phase I is as follows:

$\Delta M_\infty$	$\Delta q_\infty$	$\Delta C_D$
$\pm 0.005$	$\pm 3$ psf	$\pm 0.020$

For the booster static-stability measurements, Phase II, the estimated uncertainties are:

$M_\infty$	$\Delta C_N$	$\Delta C_m$	$\Delta C_A$	$\Delta C_{A, b}$	$\Delta \alpha$ , deg	$\Delta M_\infty$	$\Delta p_{t_\infty}$ , psf	$\Delta T_{t_\infty}$ , °F
2.00	$\pm 0.027$	$\pm 0.019$	$\pm 0.022$	$\pm 0.007$	$\pm 0.10$	$\pm 0.005$	$\pm 1.40$	$\pm 5$
2.50	$\pm 0.036$	$\pm 0.040$	$\pm 0.030$	$\pm 0.008$	$\pm 0.10$	$\pm 0.005$	$\pm 1.40$	$\pm 5$
3.00	$\pm 0.054$	$\pm 0.060$	$\pm 0.036$	$\pm 0.021$	$\pm 0.10$	$\pm 0.005$	$\pm 1.40$	$\pm 5$

The uncertainty quoted for Mach number is in reference to the ability to set and maintain a given tunnel Mach number. The variation in Mach number in the vicinity of the test articles is within  $\pm 0.02$ . The uncertainties quoted were determined by a statistical method based on a normal error distribution and a 95-percent confidence level.

## SECTION IV RESULTS AND DISCUSSION

### 4.1 PAYLOAD WITH BALLUTE, PHASE I

The variation of the ballute drag coefficient with payload-ballute separation distance,  $L/d$ , is shown in Fig. 6. Figure 6 shows that the effect of separation distance on the drag of the ballute diminishes with increasing Mach number.

Since only movie camera data were taken for the fixed-length-riser ballutes (Fig. 3b) all drag data are for the ballutes with single suspension line and variable separation distance,  $L/d$ .

Deployment and inflation were successful in all instances. The ballute on the single extendable riser with an attached swivel was observed to spin at all Mach numbers, and the spin rate increased with Mach number. The ballute with four-point suspension and no swivel showed no tendency to spin.

### 4.2 BOOSTER MODEL, PHASE II

Figures 7 and 8 present the changes in normal-force and pitching-moment coefficients, respectively, with angle of attack. The variation of center-of-pressure location with angle of attack is presented in Fig. 9 along with neutral-point locations. The booster with modified speed brake (Fig. 4) was statically stable in pitch about its center of gravity from  $M_\infty = 1.80$  to 3.00.

The variations of the static-stability parameter ( $C_{m_\alpha}$ ), the normal-force parameter ( $C_{N_\alpha}$ ), and the neutral-point location ( $x_{np}$ ) with Mach number are presented in Figs. 10, 11, and 12, respectively.

The variations of the axial-force coefficients with angle of attack for Mach numbers from 1.80 to 3.00 are presented in Fig. 13. The axial-force coefficients are based on the area of the booster face without speed brake ( $S = 0.69 \text{ ft}^2$ ). The total axial-force coefficients with

the modified speed brake were approximately 2.6 times those obtained for the initial speed brake tested (Ref. 2) and 3.6 times those for the booster alone. Forebody and base axial-force coefficients at  $\alpha = 0$  are plotted against Mach number in Figs. 14 and 15. The variation in  $C_{A, F}$  with Mach number is small in the range of this test.

## SECTION V CONCLUSIONS

The following conclusions were derived from this test:

### Phase I

1. The ballute with single-point suspension deployed well and inflated quickly but spun at a rate which increased as Mach number was increased.
2. The drag of the ballute generally decreased as it was positioned at greater distance downstream of the payload at Mach numbers of 2.00 and 2.50. At Mach number 3.0, the drag was invariant with ballute location.
3. The ballute with the four-point suspension and fixed riser length deployed and inflated satisfactorily at Mach numbers of 0.55, 2.20, and 3.00. No tendency to spin was shown at any of these Mach numbers.


### Phase II

1. The total axial force of the booster with the modified speed brake was approximately 3.6 times greater than the total axial force of the booster alone at  $M_\infty = 3.00$ .
2. The booster with modified speed brake was statically stable in pitch about the indicated center-of-gravity position.

## REFERENCES


1. White, W. E. and Brice, T. R. "Static Stability Characteristics of the ALARR Payload and the Effect of the Wake on the Ballute Decelerator Characteristics at Transonic Speeds." AEDC-TR-65-265 (AD 475565), December 1965.
2. Perkins, T. M. and Brice, T. R. "Static Stability and Separation Characteristics of 0.6-Scale Models of the ALARR Payload and Booster at Supersonic Speeds." AEDC-TR-65-74 (AD 461134), April 1965.
3. Test Facilities Handbook (5th Edition). "Propulsion Wind Tunnel Facility, Vol. 3." Arnold Engineering Development Center, July 1963.



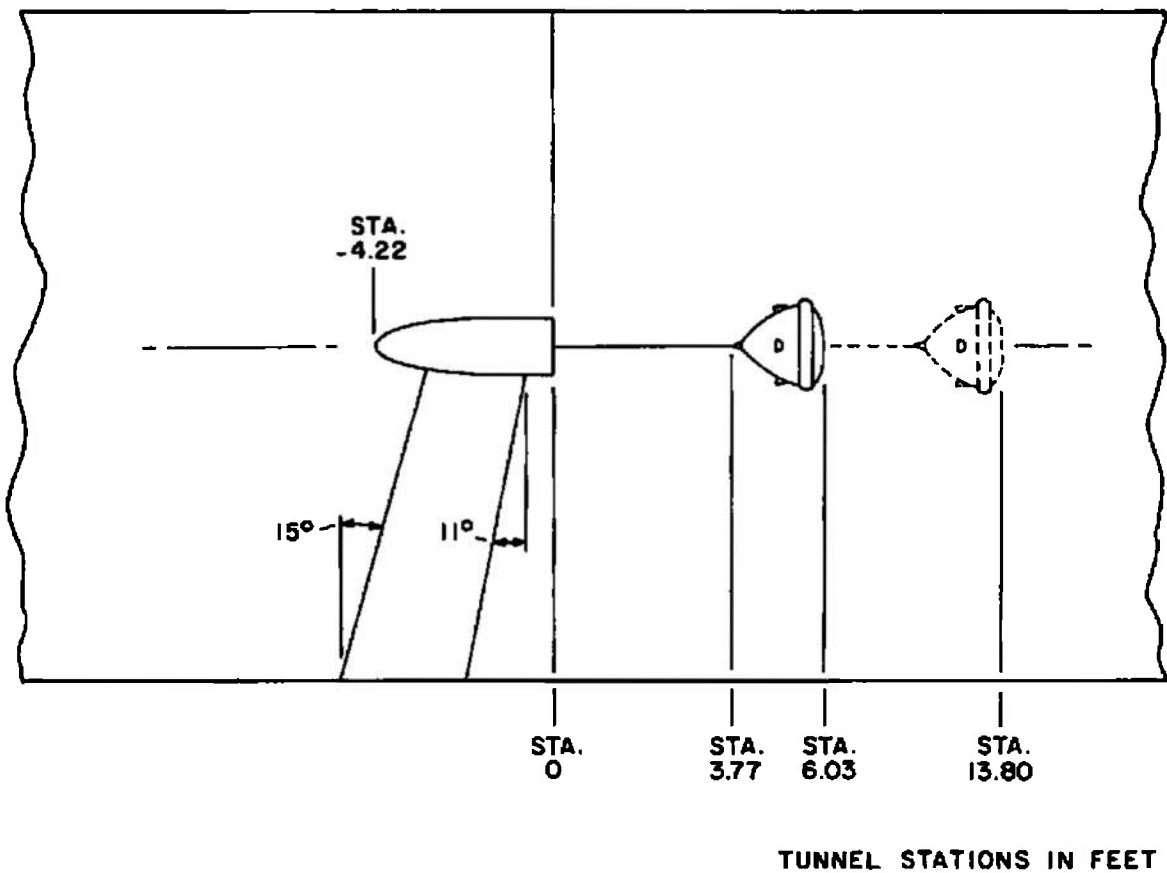

a. Payload with Ballute, Phase I

Fig. 1 Schematic of Tunnel 165 Test Section Showing Model Location

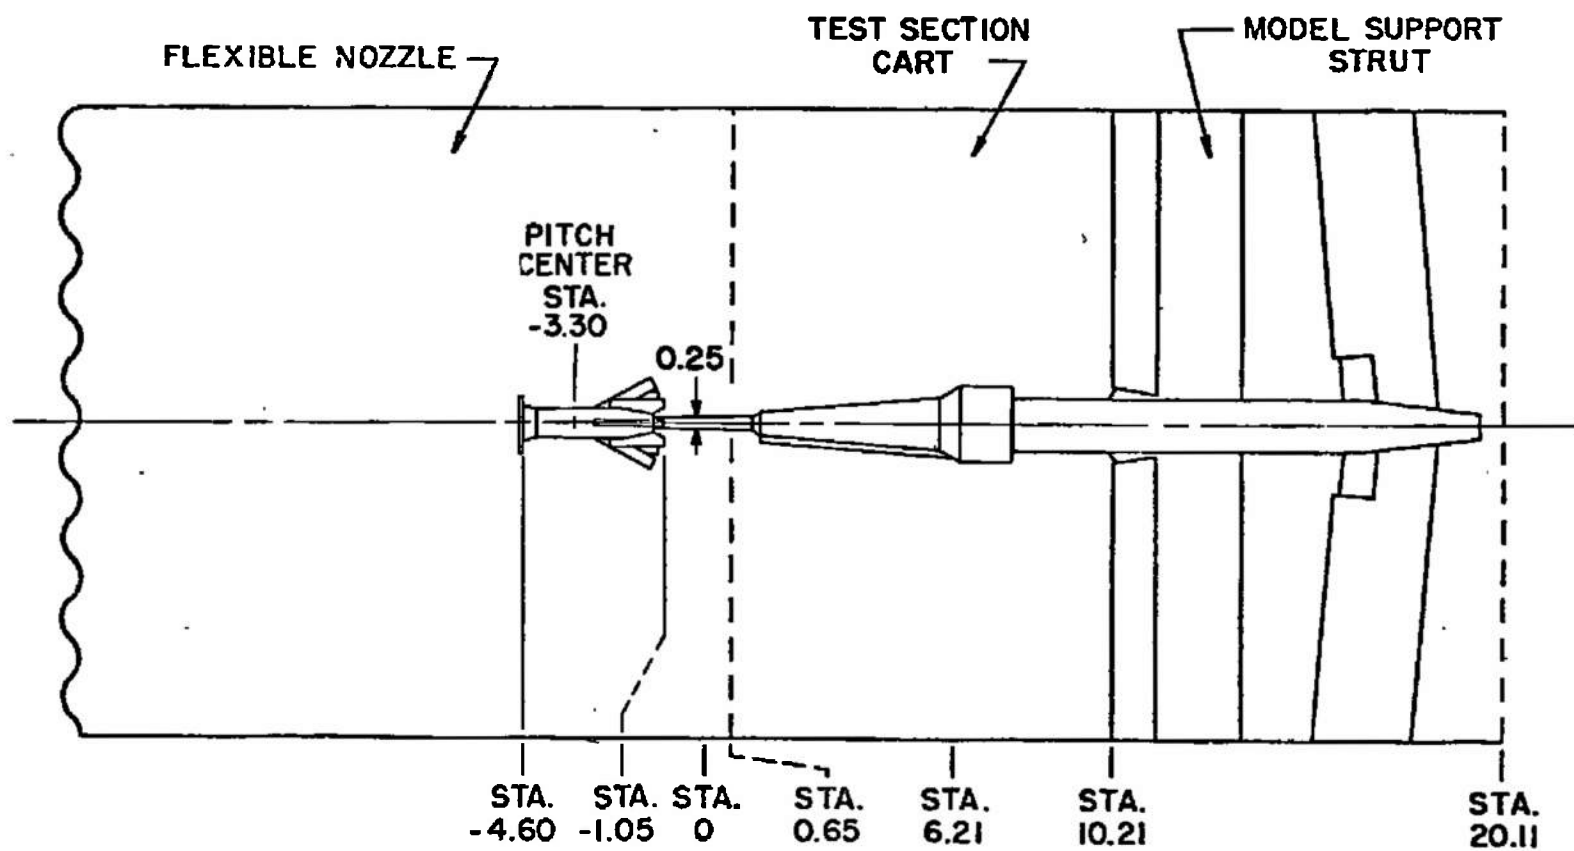

ALL DIMENSIONS AND TUNNEL STATIONS IN FEET


b. Booster with Modified Speed Brake, Phase II

Fig. 1 Concluded




a. Payload

Fig. 2 Photographs of ALARR Models Installed in Tunnel 16S

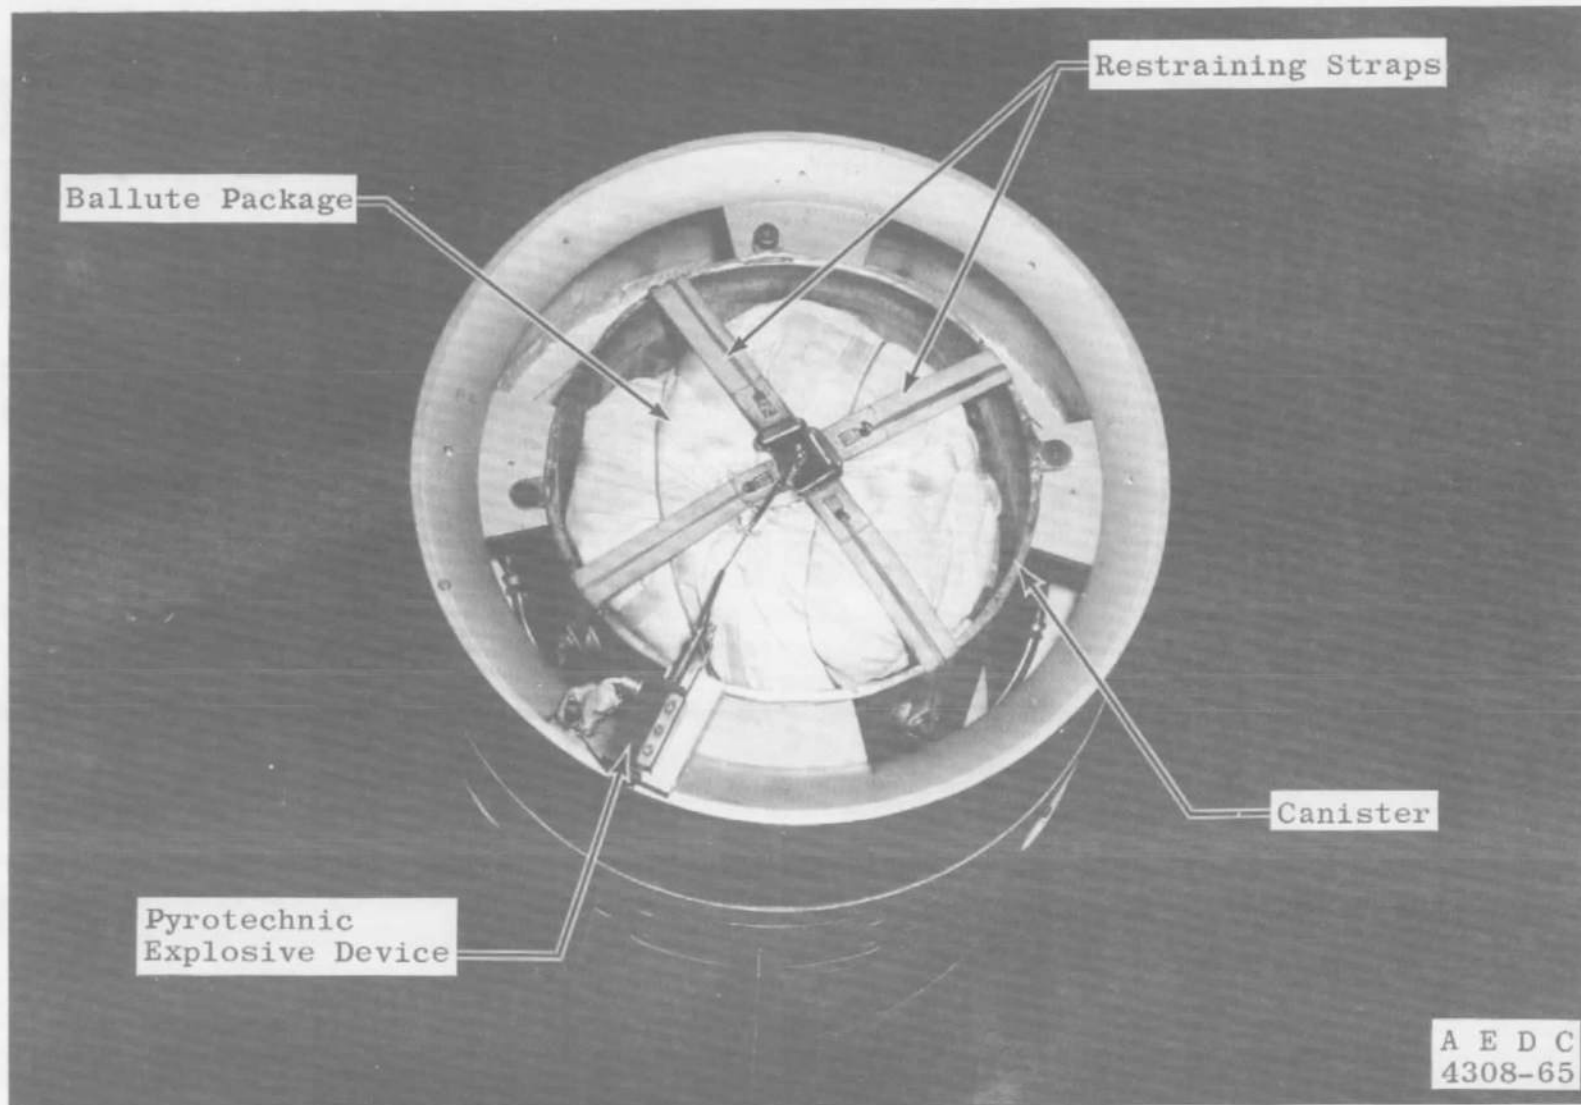


b. Ballute Package in Payload Base

Fig. 2 Continued

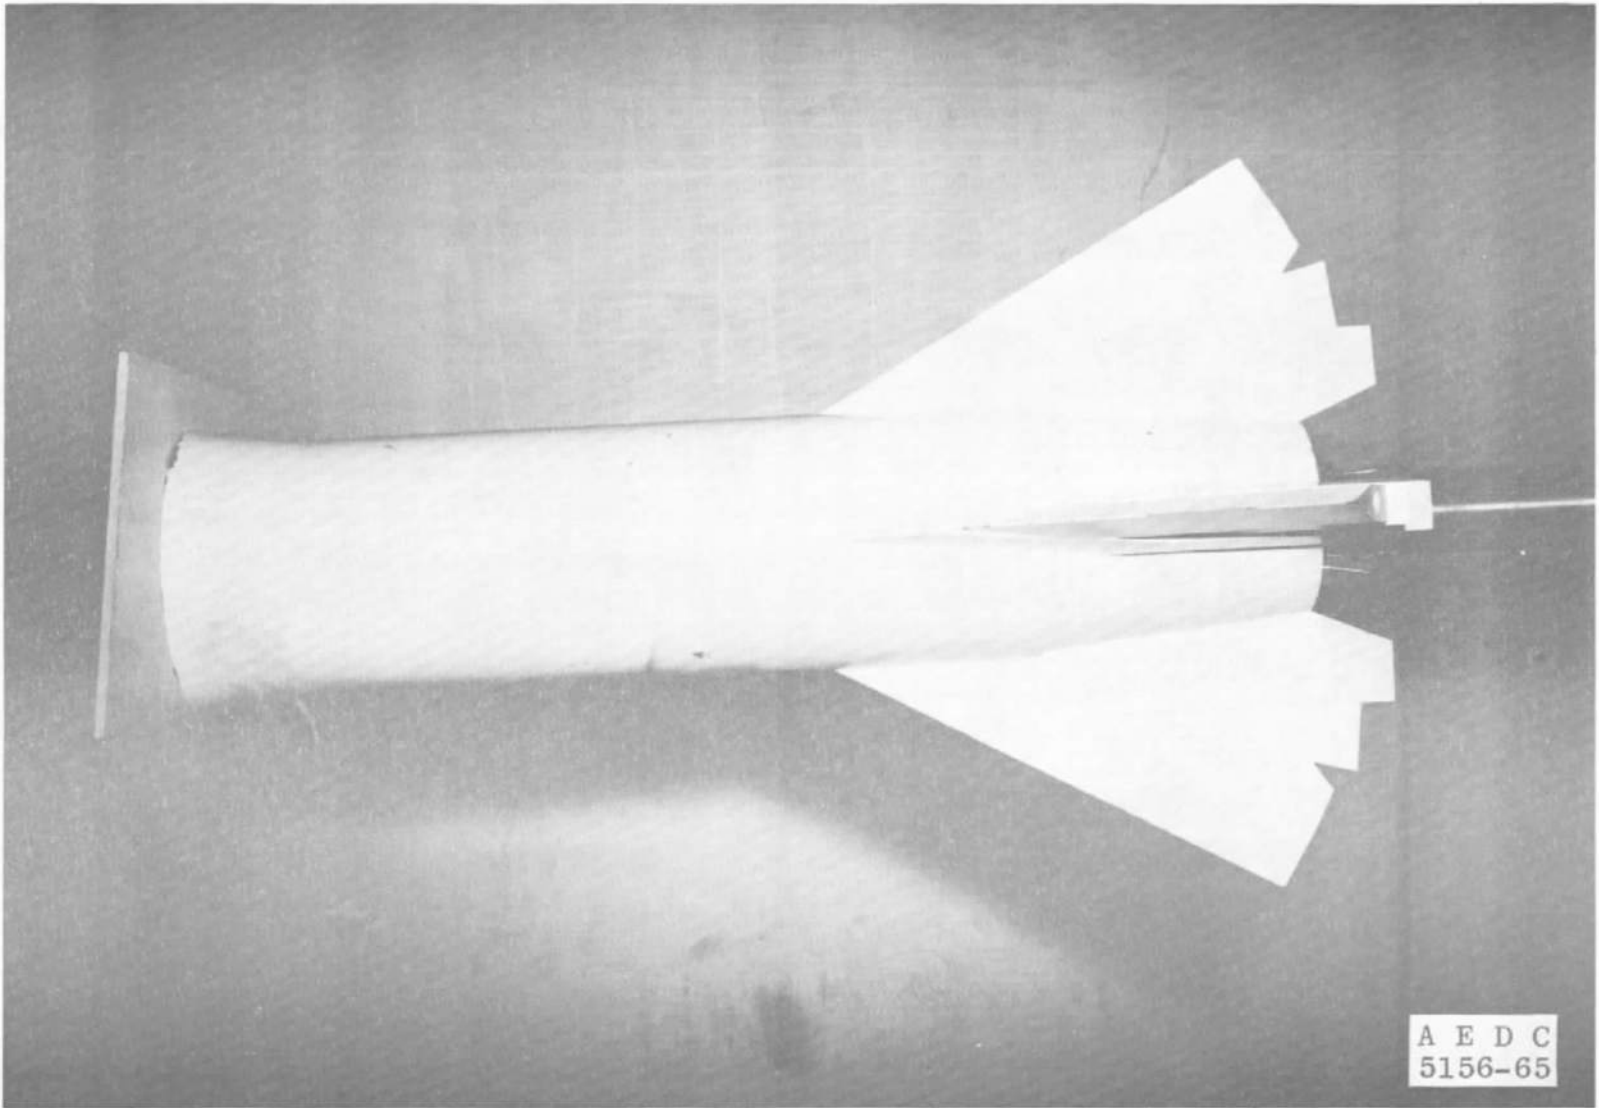


c. Booster with Modified Speed Brake

Fig. 2 Concluded


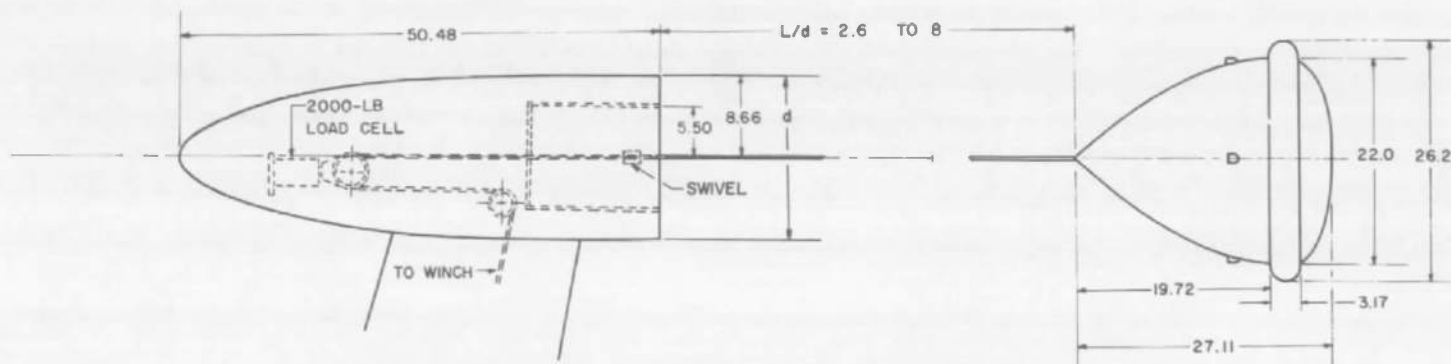


a. Payload with Movable Ballute and Single Suspension Line

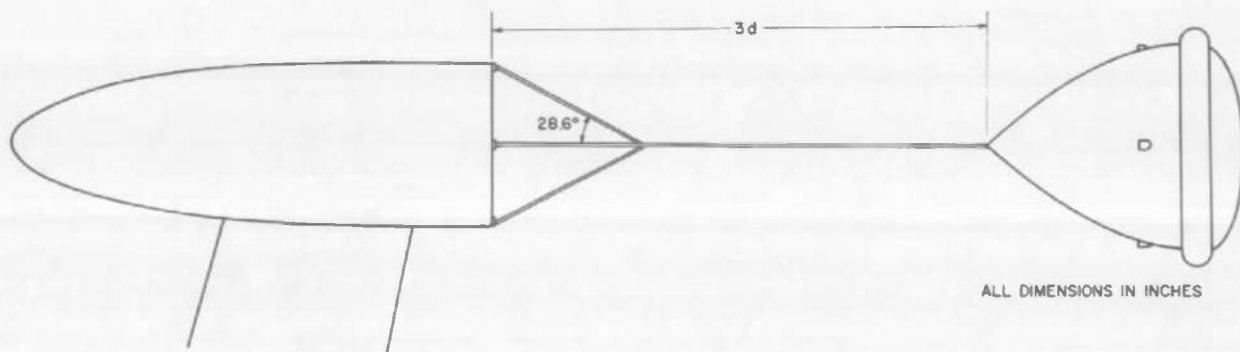

b. Payload with Fixed Ballute and Four-Point Suspension Lines


Fig. 3 Details of Models

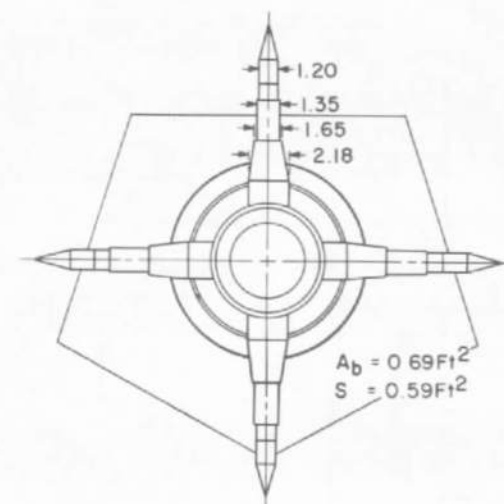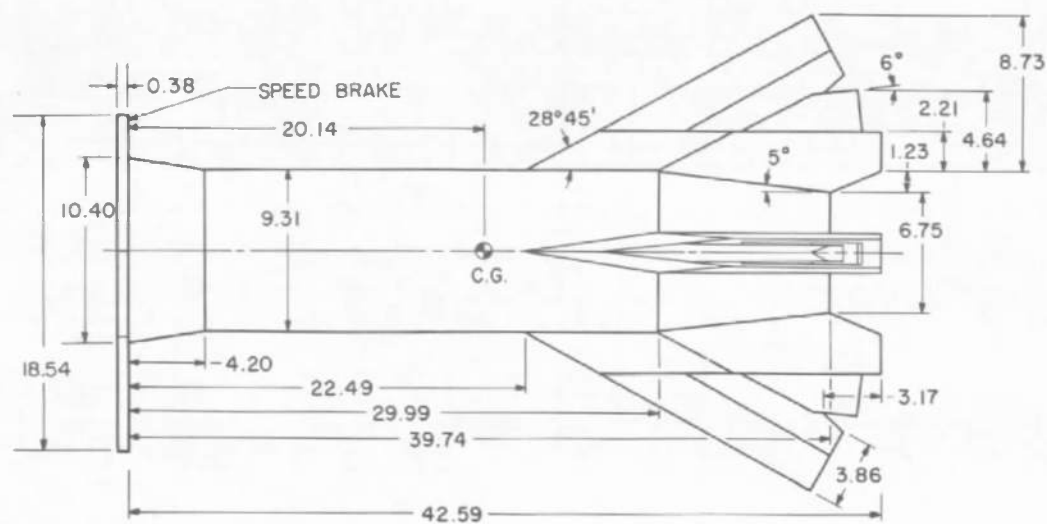

ALL DIMENSIONS IN INCHES

c. Booster with Modified Speed Brake

Fig. 3 Concluded

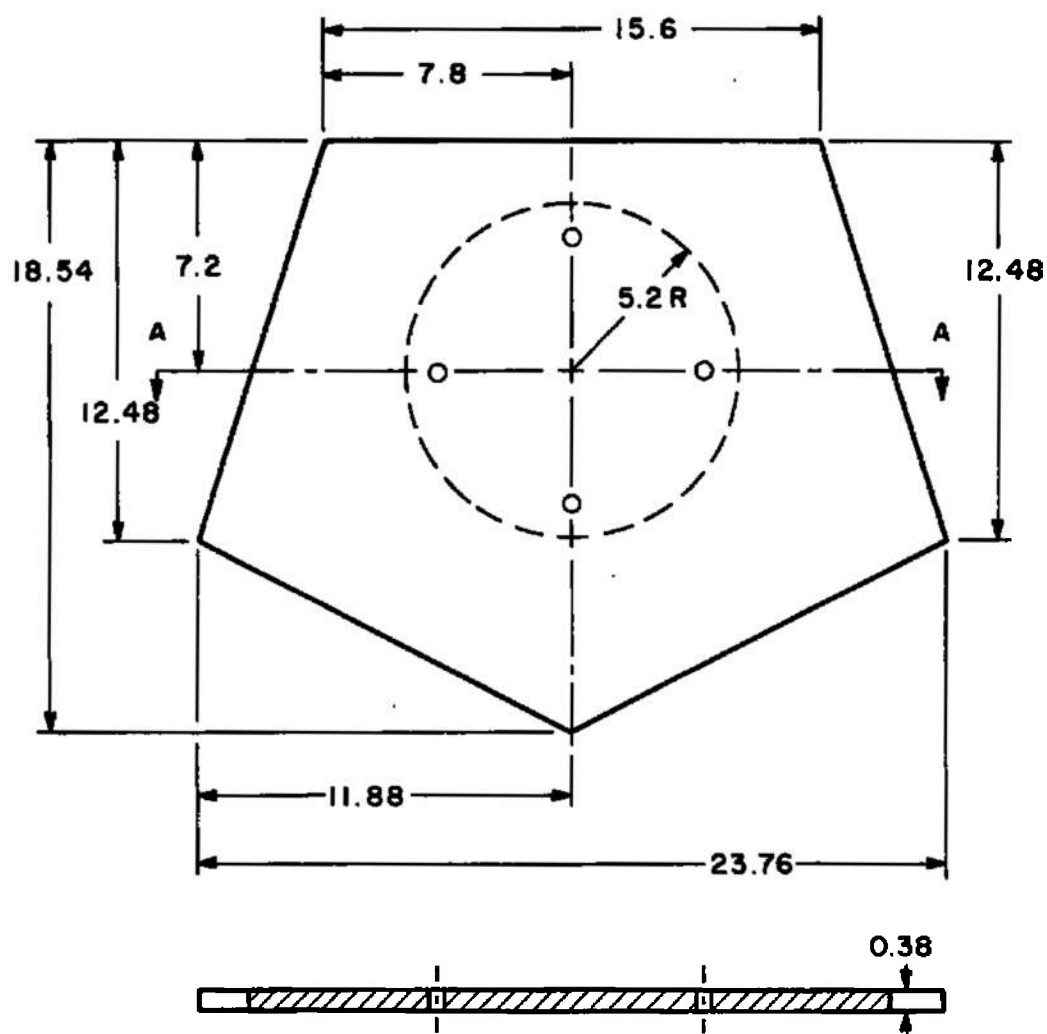

SECTION A - A

ALL DIMENSIONS IN INCHES

Fig. 4 Modified Speed Brake



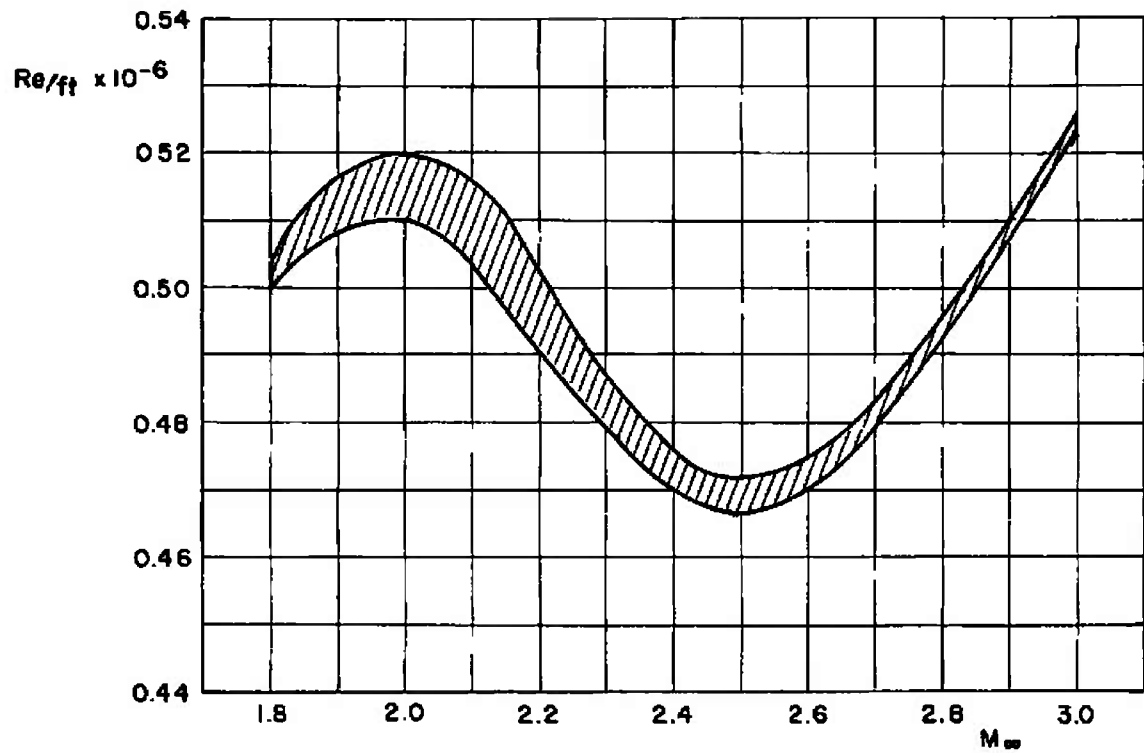


Fig. 5 Variation of Reynolds Number with Mach Number for Booster Phase (Phase II)

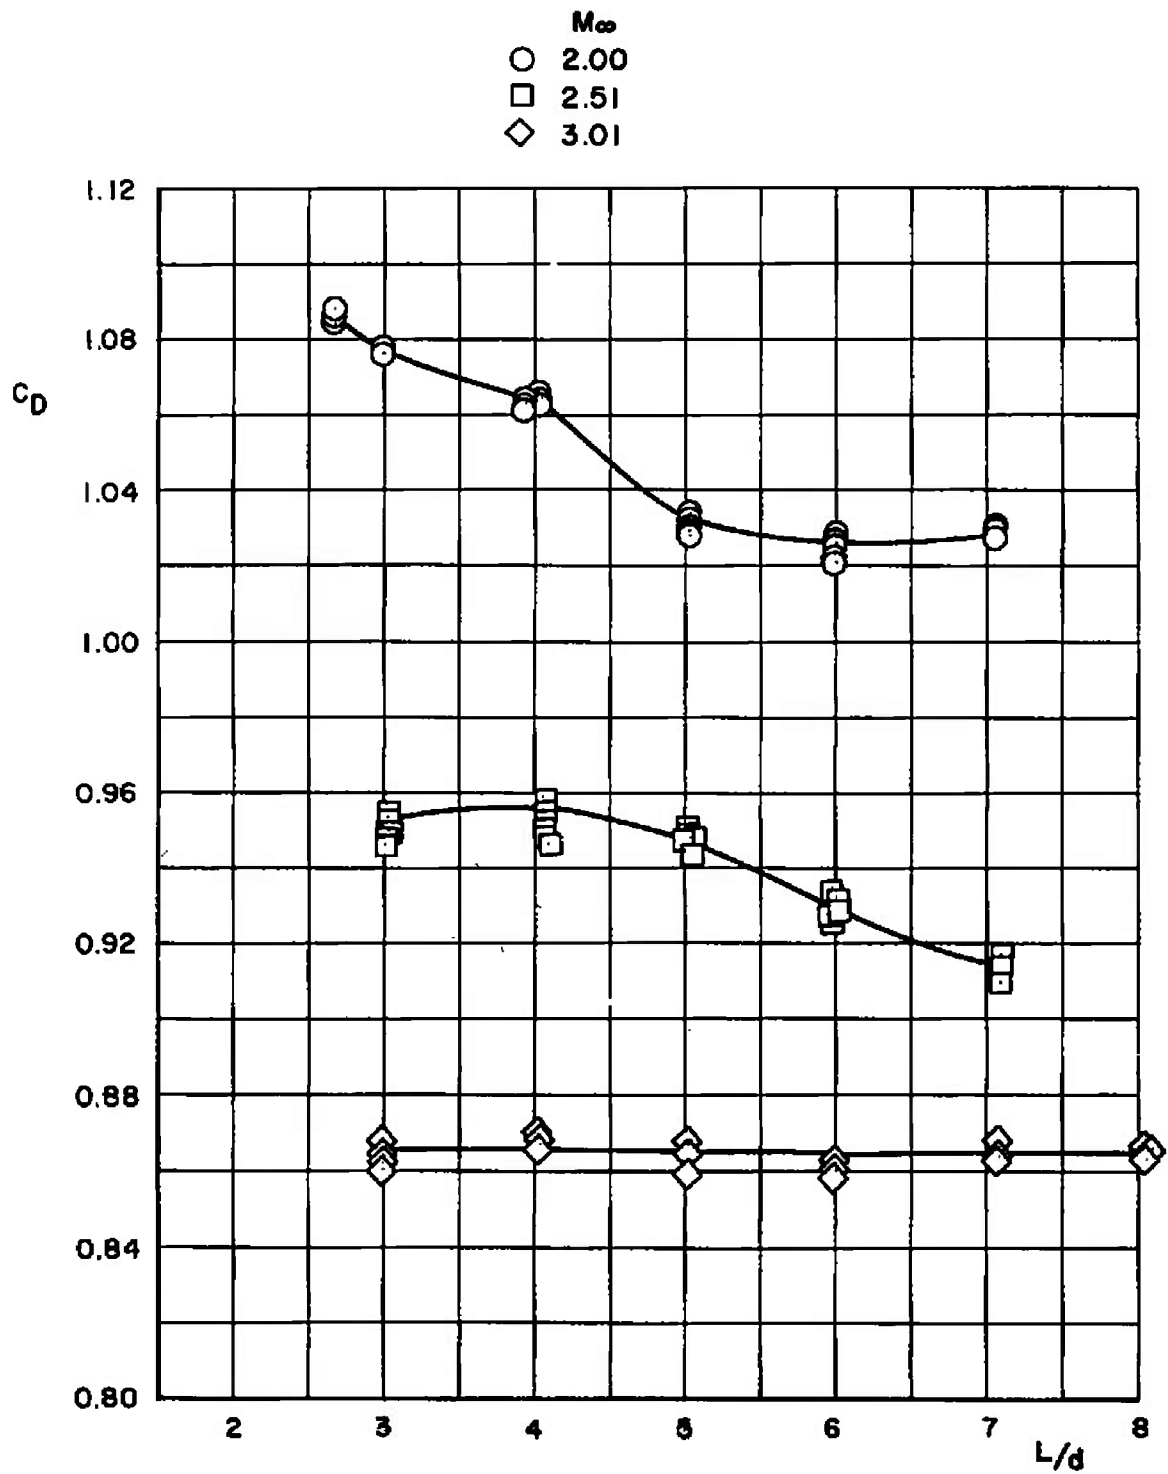


Fig. 6 Variation of Ballute Drag Coefficient with Payload-Ballute Separation Distance

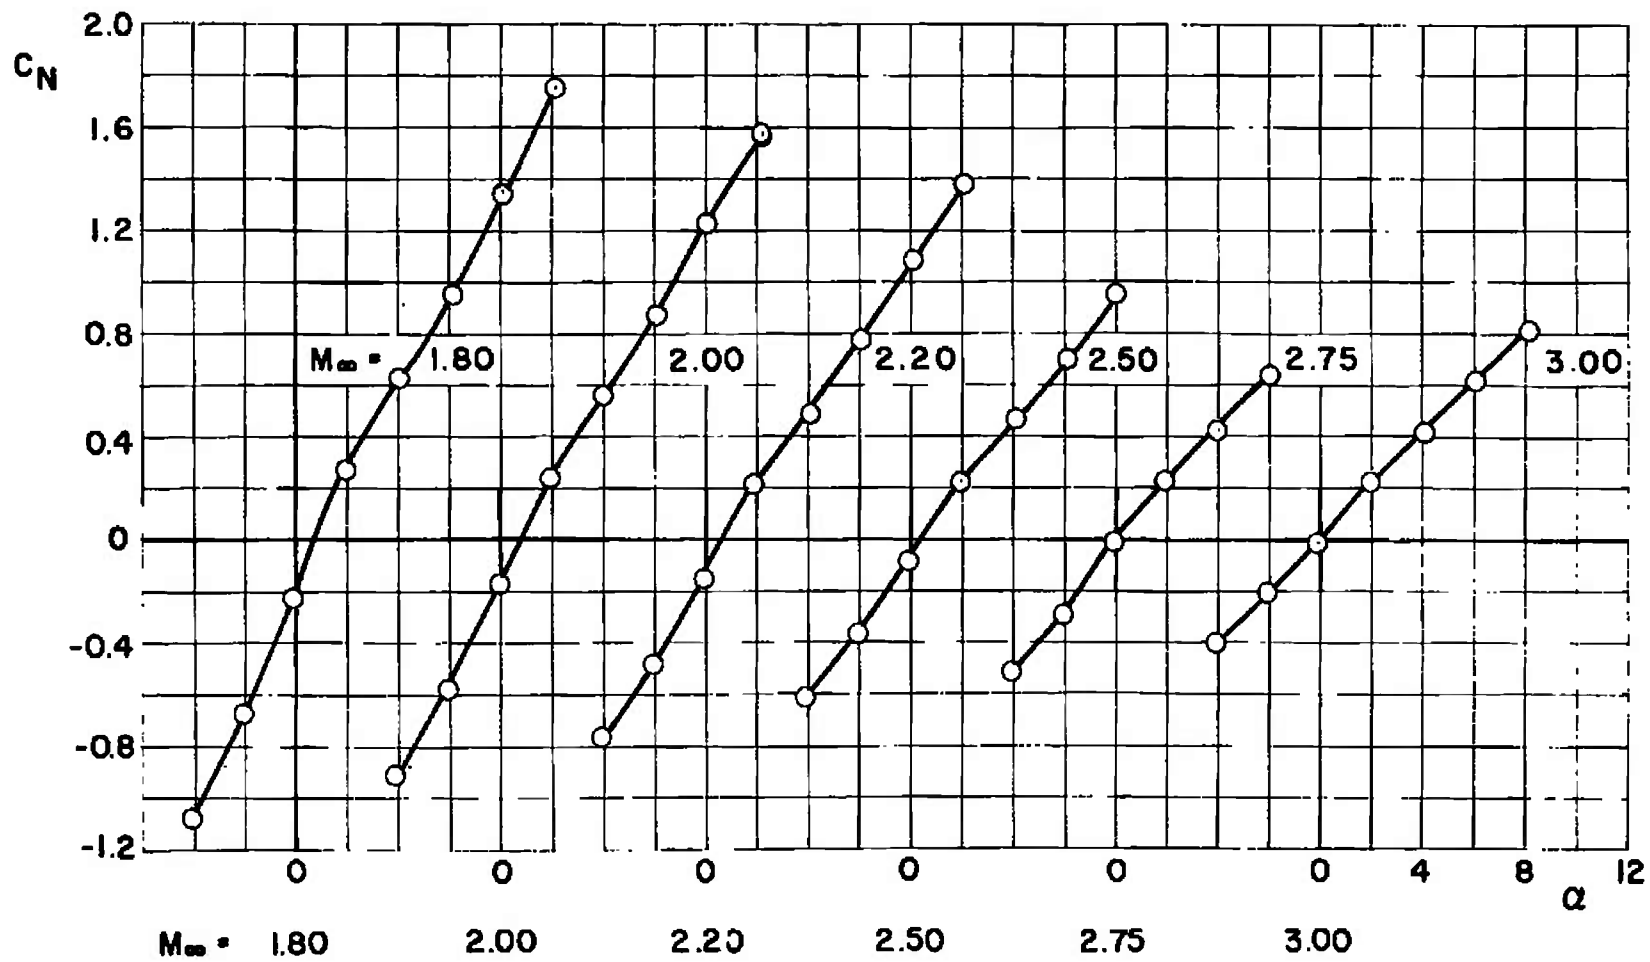


Fig. 7 Variation of Normal-Force Coefficient with Angle of Attack

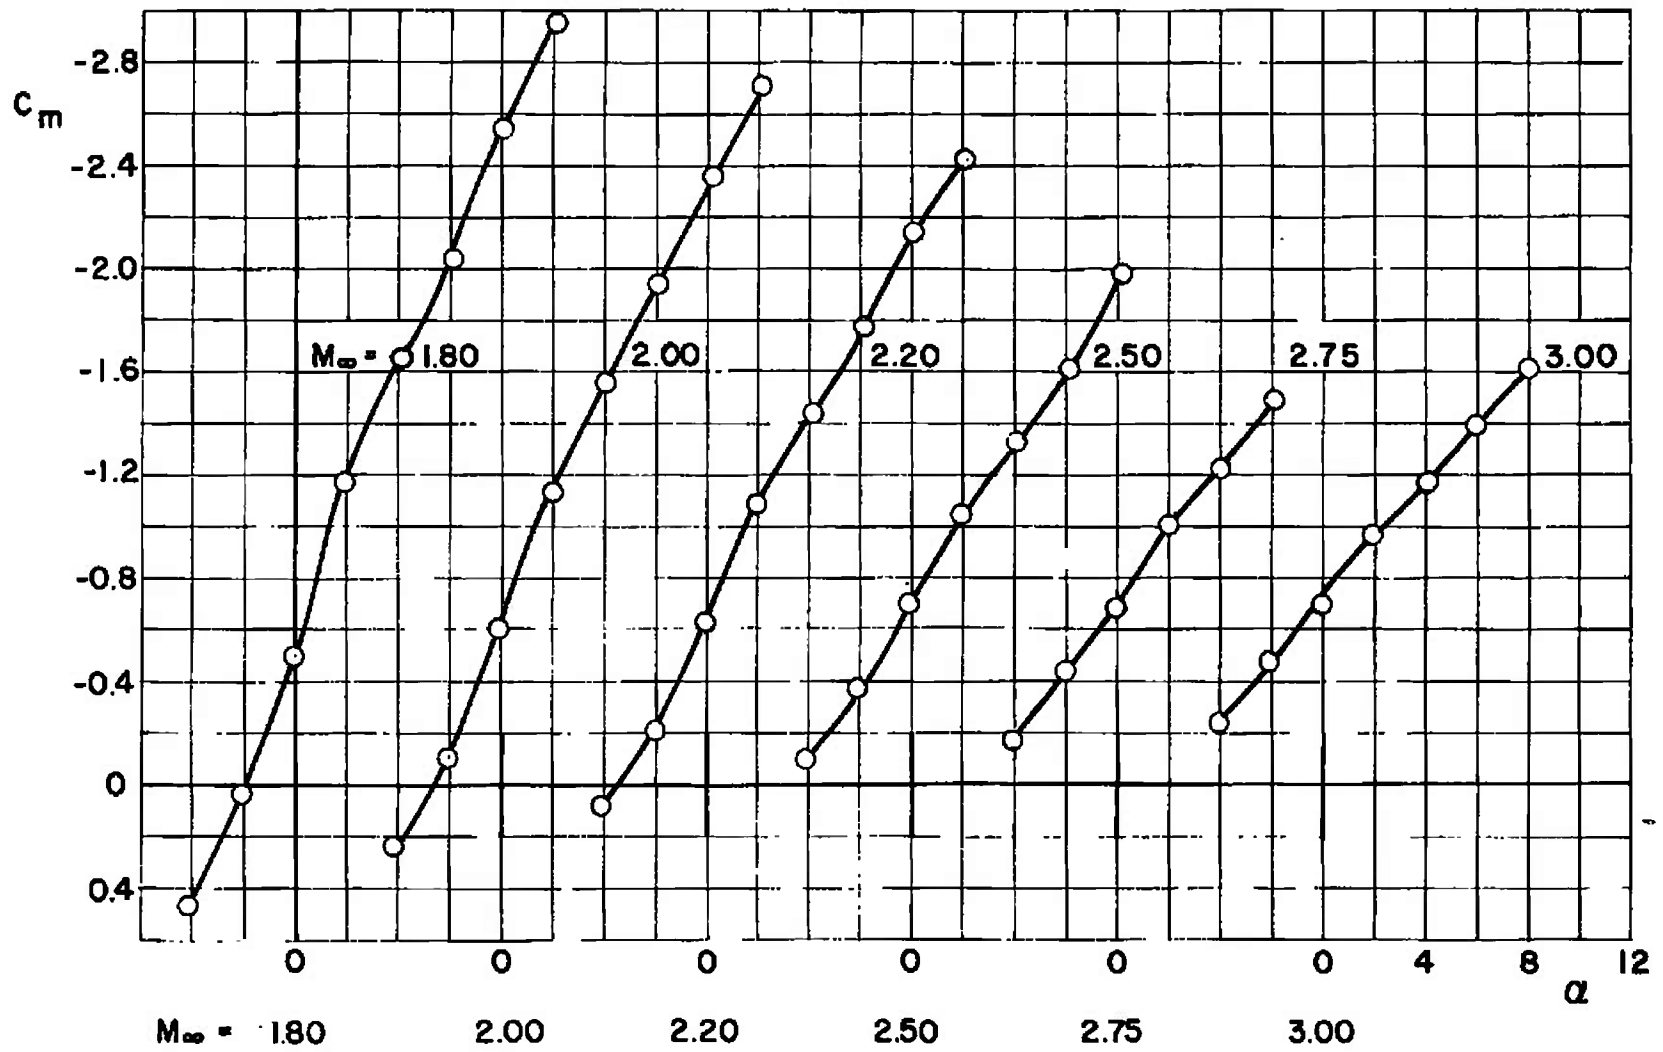


Fig. 8 Variation of Pitching-Moment Coefficient with Angle of Attack

FLAGGED SYMBOLS INDICATE NEUTRAL-POINT LOCATIONS

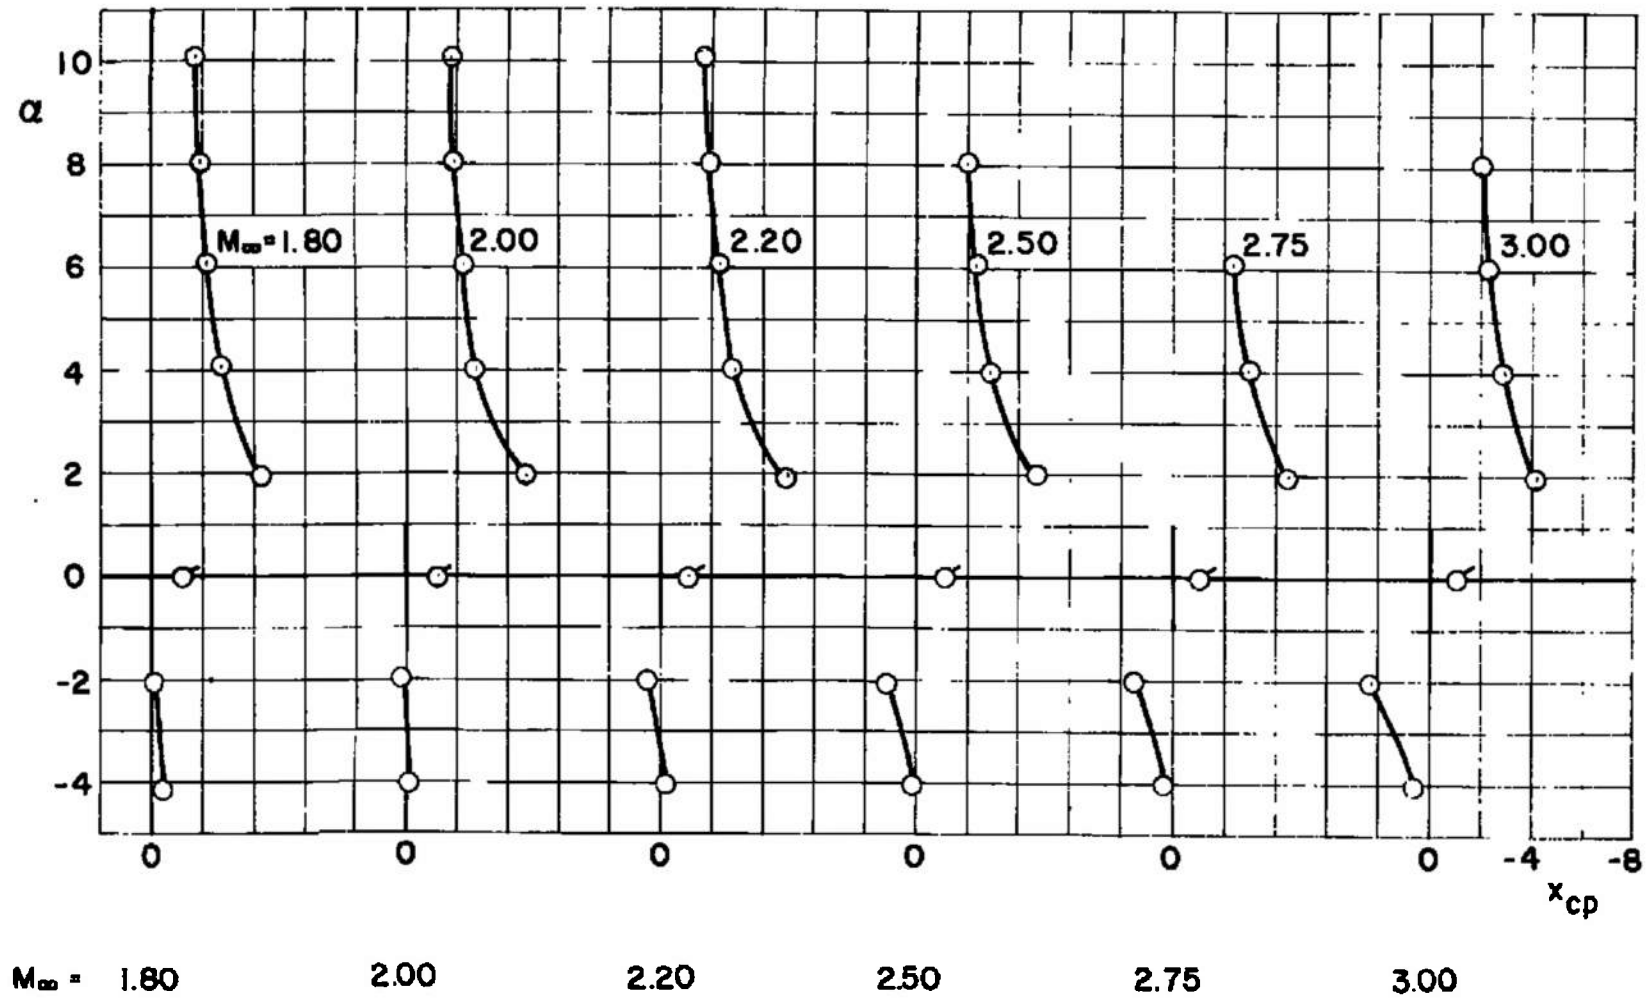


Fig. 9 Variation of Center-of-Pressure Location with Angle of Attack

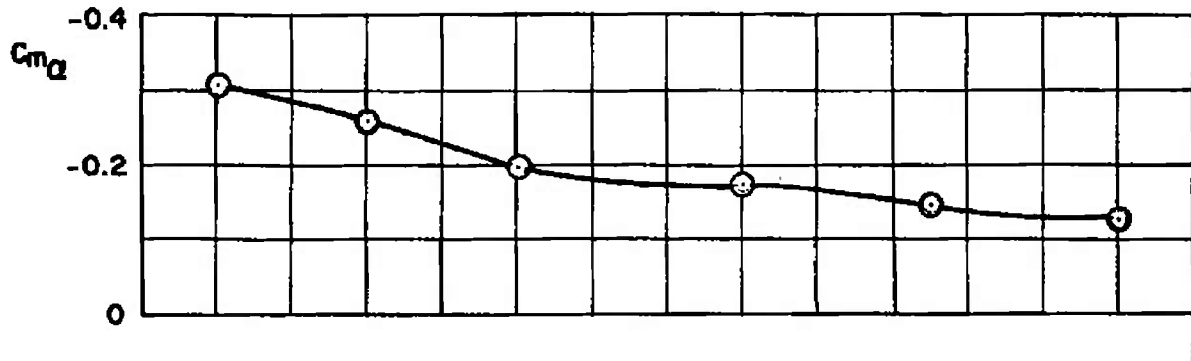


Fig. 10 Variation of the Rate of Change of Pitching-Moment Coefficient with Mach Number at  $\alpha = 0$

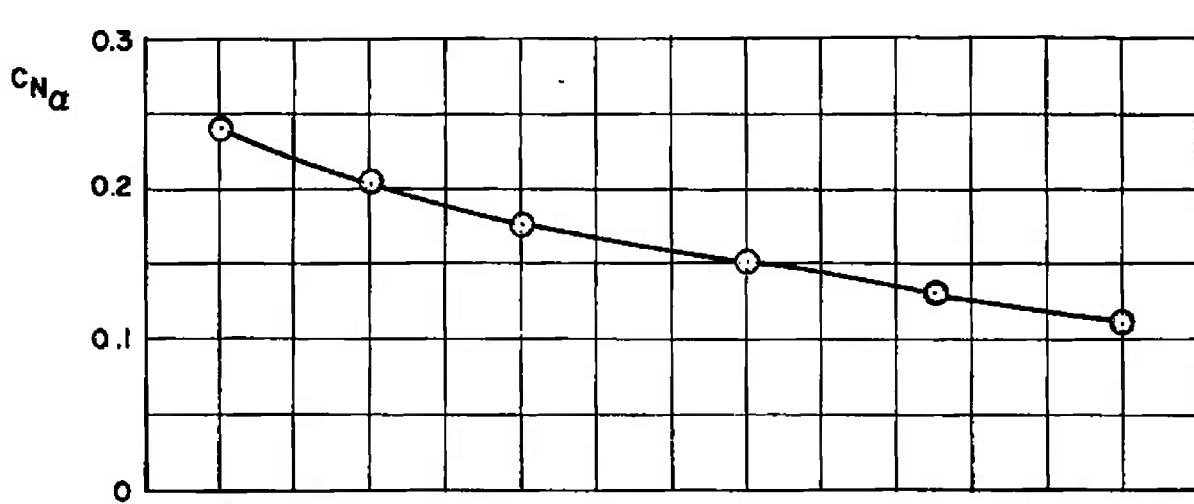


Fig. 11 Variation of the Rate of Change of Normal-Force Coefficient with Mach Number at  $\alpha = 0$

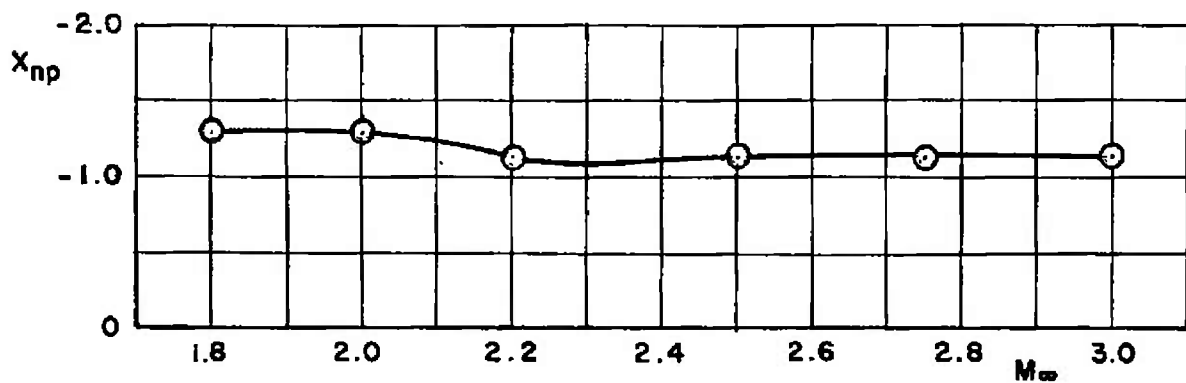


Fig. 12 Variation of Neutral-Point Location with Mach Number

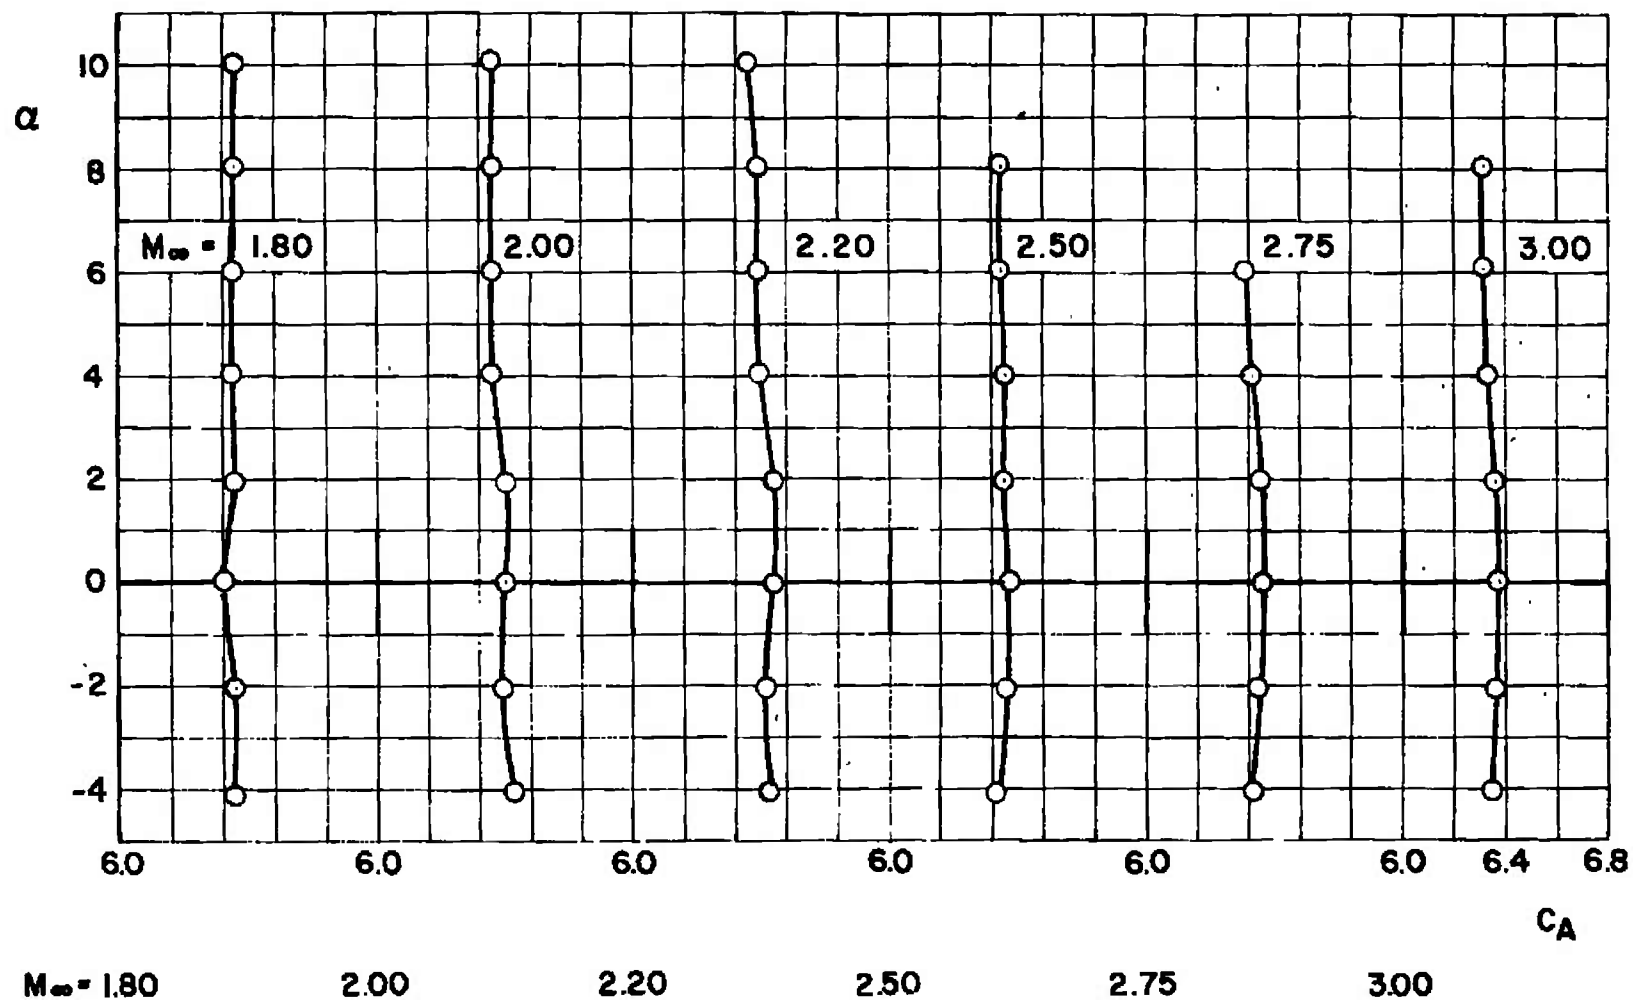


Fig. 13 Variation of Axial-Force Coefficient with Angle of Attack

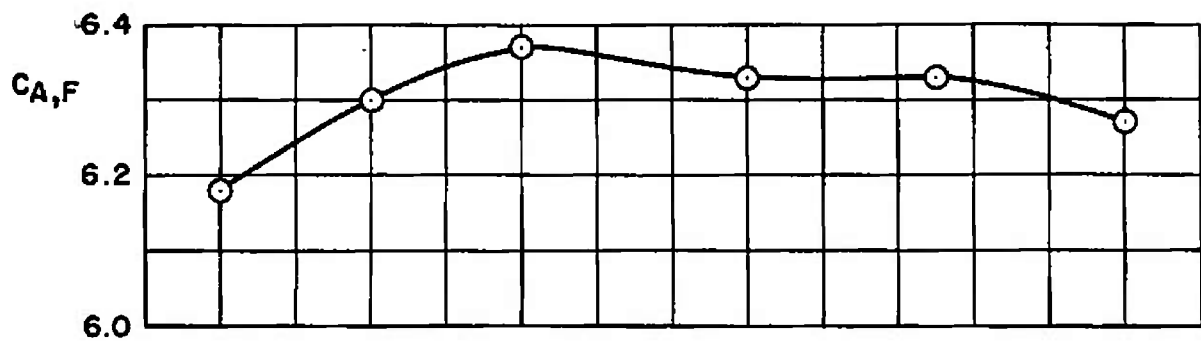


Fig. 14 Variation of Forebody Axial-Force Coefficient with Mach Number at  $\alpha = 0$

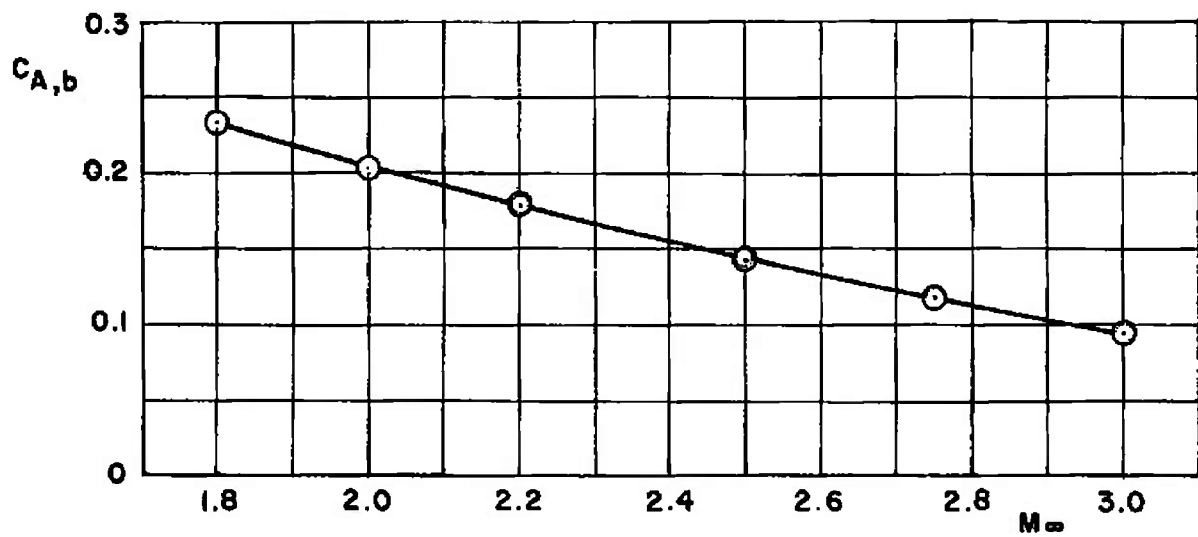


Fig. 15 Variation of Base Axial-Force Coefficient with Mach Number at  $\alpha = 0$



## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center (AEDC), ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2a. REPORT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>
		2b. GROUP N/A
3. REPORT TITLE <b>STATIC-STABILITY CHARACTERISTICS OF THE ALARR BOOSTER AND THE EFFECT OF THE PAYLOAD WAKE ON A FULL-SCALE BALLUTE AT SUPERSONIC SPEEDS</b>		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A		
5. AUTHOR(S) (Last name, first name, initial)  Perkins, T. M. and Brice, T. R., ARO, Inc.		
6. REPORT DATE <b>February 1966</b>	7a. TOTAL NO. OF PAGES <b>30</b>	7b. NO. OF REFS <b>3</b>
8a. CONTRACT OR GRANT NO. <b>AF40(600)-1200</b>	9a. ORIGINATOR'S REPORT NUMBER(S)  <b>AEDC-TR-66-36</b>	
b. PROJECT NO. <b>9087</b>		
c. System <b>921A</b>	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) N/A	
d.		
10. AVAILABILITY/LIMITATION NOTICES Qualified requesters may obtain copies of this report from DDC. Transmittal to foreign governments or foreign nationals may be made only with prior approval of AFSWC (SWTSS).		
11. SUPPLEMENTARY NOTES  N/A	12. SPONSORING MILITARY ACTIVITY <b>Air Force Special Weapons Center (AFSWC), Air Force Systems Command (AFSC), Kirtland AFB, New Mexico</b>	
13. ABSTRACT  Investigations were conducted in the 16-ft supersonic wind tunnel of the Propulsion Wind Tunnel Facility to determine the drag and stability characteristics of a ballute deployed in the wake of a full-scale Air Launch, Air Recoverable Rocket (ALARR) payload. The ballutes were deployed at Mach numbers 0.55 and 2.00 to 3.00 and exhibited excellent deployment and inflation characteristics. Force data were obtained on a 0.6-scale model of the ALARR booster with a modified speed brake at Mach numbers from 1.80 to 3.00. The booster with speed brake was statically stable in pitch for all Mach numbers tested.		

## KEY WORDS

stability  
ALARR booster  
ballutes  
supersonic flow  
deployment  
inflation  
drag

## LINK A

## LINK B

## LINK C

ROLE

WT

ROLE

WT

ROLE

WT

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.